

QUICK GUIDE

Connecting your PTT Voice Responder
to Kenwood NEXEDGE NX-3000, NX-5000
Series and LTE handsets (EN)



A

Pairing the AINA PTT Voice Responder to Kenwood's NEXEDGE series

Requirements: The Serial Port Profile (SPP) needs to be enabled by loading the file KWD-3002BT for NX-3000 and KWD-5003BT for NX-5000 into the Bluetooth Data menu under Transceiver and Product Information. Please contact your Kenwood radio dealer to get this enabled!

1. Put your AINA PTT Voice Responder into Kenwood pairing mode by holding the Call answer button while powering it ON
2. On the Kenwood radio, press the Home button (top left button / double page icon)
3. Select the Bluetooth settings
4. Select "BT Device"
5. Select "Find Device"
6. Select your AINA accessory from the list of available devices
7. Confirm the connection request by pressing the Home button



NOTE: The Voice Responder can only be paired with one device at a time. If you want to pair it to another device you need to perform an **Unpairing/ Software reset** before by pressing and holding both arrow buttons and both PTT buttons simultaneously, until the LED turns off.




B

Pairing the AINA PTT Voice Responder to Kenwood's LTE handsets

Requirements: Make sure to download or update to the latest BLE app.

1. Go to the phone's Settings and select 'Bluetooth'
2. Select your PTT Voice Responder from the list of available devices (see friendly name on the back)
3. Wait for your device to pair
4. Go to the BLE app
5. Select your Voice Responder from the list

Phone Bluetooth Settings:

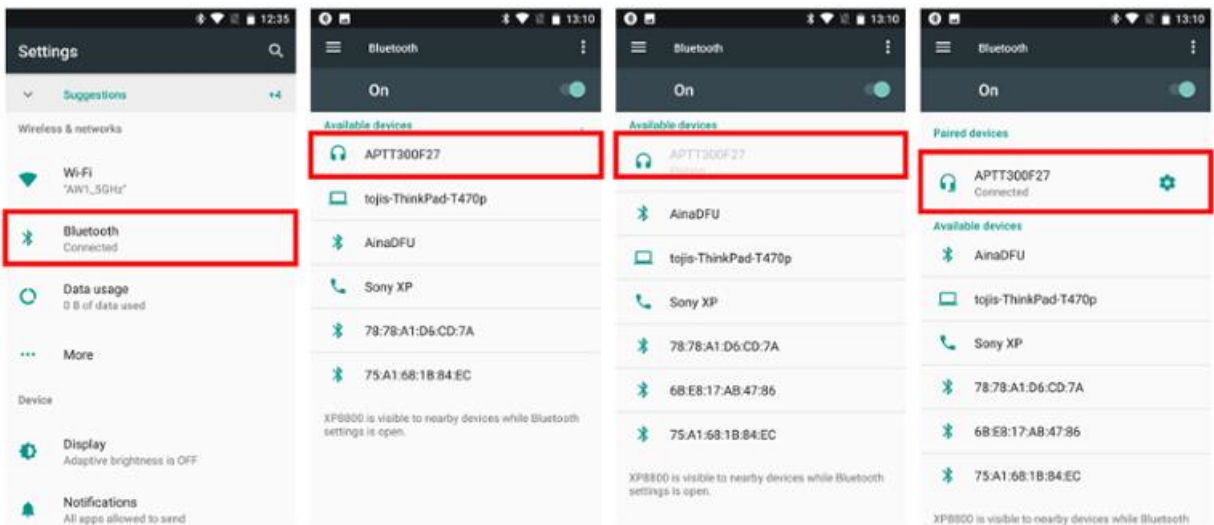

BLE app:



NOTE: The Voice Responder can only be paired with one device at a time. If you want to pair it to another device you need to perform an **Unpairing/ Software reset** before by pressing and holding both arrow buttons and both PTT buttons simultaneously, until the LED turns off.

