

QUICK GUIDE


Connecting your PTT Voice Responder
to RadioPro Talk (iOS) (EN)



A

Pairing your PTT Voice Responder with your iPhone via Bluetooth

1. Turn on your PTT Voice Responder by holding down the Power button for more than 3 seconds. After it is on, a blinking green light will indicate that the device is ready for pairing.
2. Turn on your iPhone's Bluetooth by going to: Settings → Bluetooth → Turn on.
3. Pair your PTT Voice Responder to your iPhone by selecting it from the Devices list. To know which device to select from the list, check the unique friendly name on the back of your Voice Responder. Once it has successfully paired, a blue light will begin blinking on your device.

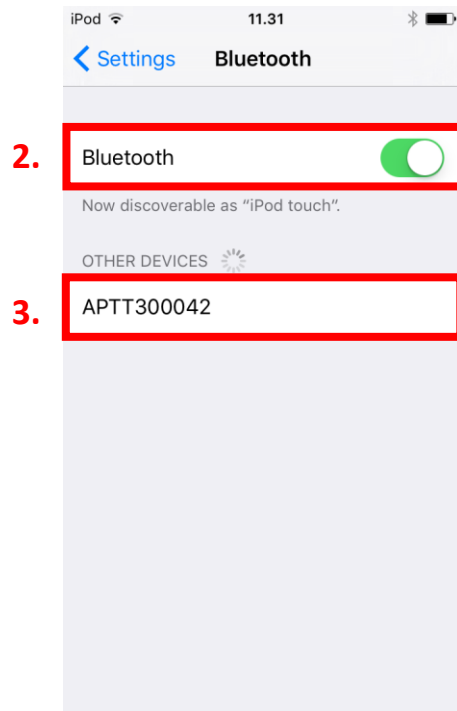




NOTE: The Voice Responder can only be paired with one device at a time. If you want to pair it to another device you need to perform an **Unpairing/ Software reset** by pressing and holding both arrow buttons and both PTT buttons simultaneously, until the LED turns off.



B

Connecting your PTT Voice Responder to RadioPro Talk

1. Open RadioPro Talk and from the main Connections screen, Press the Bluetooth button.
2. Press the PTT1 button on the PTT Voice Responder.
3. Choose your device from the list.
4. When the Bluetooth device page comes up, press the PTT1 button on the device again (Choose 'Yes' If you are asked to pair the bluetooth low energy device).
5. When the device's PTT signal is recognized, you will be able to choose "Use this device".
6. From here on, this PTT Voice Responder will be used whenever you connect to a RadioPro Gateway.

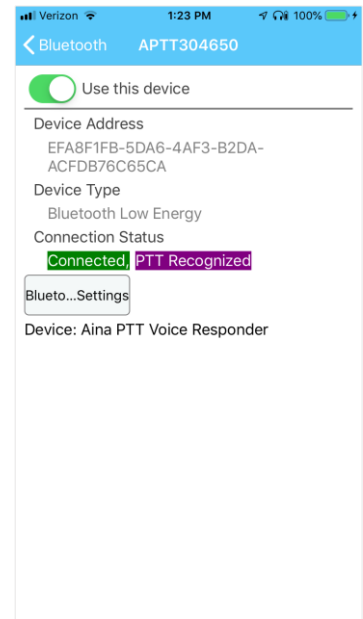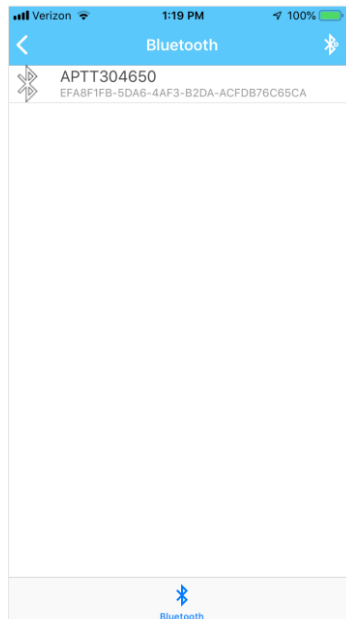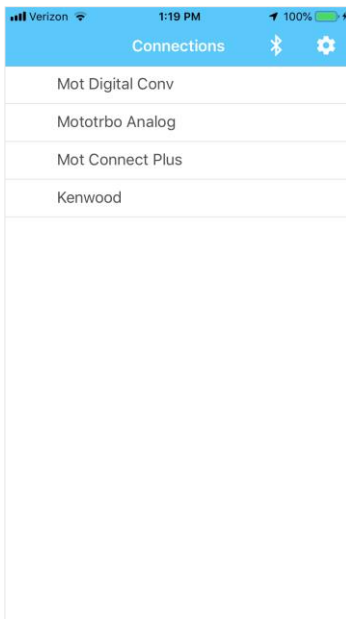

For more information on how to use the RadioPro Talk application please visit their website:

<http://www.ctiproducts.com/RadioPro.html>

