

## QUICK GUIDE


Connecting your PTT Voice Responder  
to Smart Talk (Android) (EN)



# A

## Pairing your PTT Voice Responder with your smartphone via Bluetooth

1. Turn on your PTT Voice Responder by holding down the Power button for more than 3 seconds. After it is on, a blinking green light will indicate that the device is ready for pairing.
2. Turn on your smartphone's Bluetooth by going to: Settings → Bluetooth → Turn on.
3. Pair your PTT Voice Responder to your smartphone by selecting it from the 'Available devices' list. To know which device to select from the list, check the unique friendly name on the back of your Voice Responder. Once it has successfully paired, a blue light will begin blinking on your device.

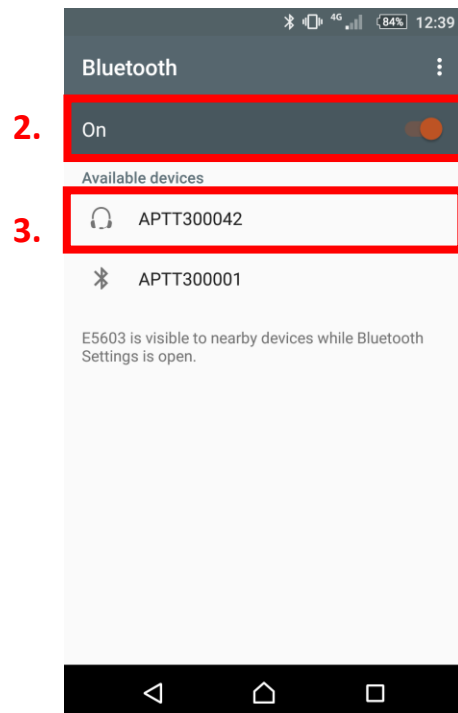


**NOTE:** The Voice Responder can only be paired with one device at a time. If you want to pair it to another device you need to perform an **Unpairing/ Software reset** by pressing and holding both arrow buttons and both PTT buttons simultaneously, until the LED turns off.



# B

## Connecting your PTT Voice Responder to Smart Talk

1. Open Smart Talk and set the AINA PTT Voice Responder as the sound device. To do so, go to the Contacts tab, tap PTT Channel, tap More Options and tap Sound devices.
2. Select the PTT Voice Responder. The device is ready for PTT.
3. Later, when you initiate a PTT call using Smart Talk, the system may request a permission for location services if you have not accepted it. Smart Talk requires this permission from you in order to access the AINA PTT Voice Responder using Bluetooth LE.

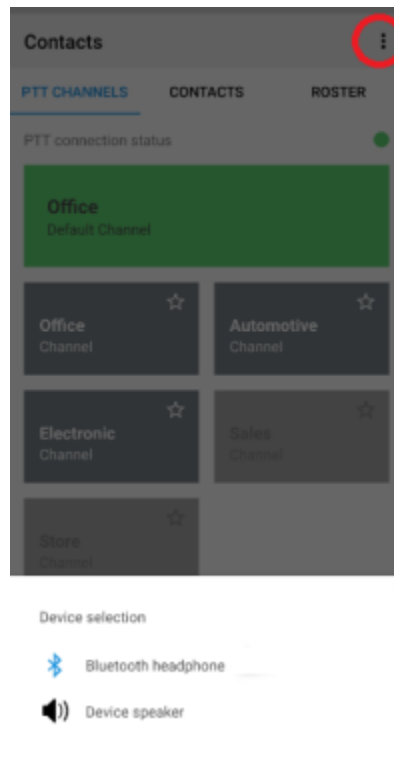

For more information on how to use Honeywell's Smart Talk application please visit their website:  
<https://sps.honeywell.com/us/en>

